

SP33 SERIES - 1/3 HP

APPLICATIONS

Basement sumps, dewatering, water transfer

FEATURES

- Oil-free motor with thermal overload protection
- Designed for continuous duty
- 1-1/4" NPT (31.7 mm) discharge
- Handles up to 1/4" (6 mm) solids
- Built-in suction strainer
- Removable filter screen
- 120 °F (49 °C) liquid temperature rating
- cCSAus listed



SERIES SPECIFICATIONS


Volts	Hz	Amps		Watts	Performance (GPM @ Height in Feet)			Shut-Off (ft)	PSI
		FLA	Start		5'	10'	15'		
115	60	3.5	6.4	355	30	22	15	23	10

Item No.	Model	Volts	Switch Type/Operation	On Level	Off Level	Cord	Weight
620135	SP33A	115	Mechanical Float	11.8" 29.9 cm	5.9" 14.9 cm	10' 3 m	10 lbs 4.55 Kg

SUMP PUMPS


SP33 SERIES - 1/3 HP

ENGINEERING DATA

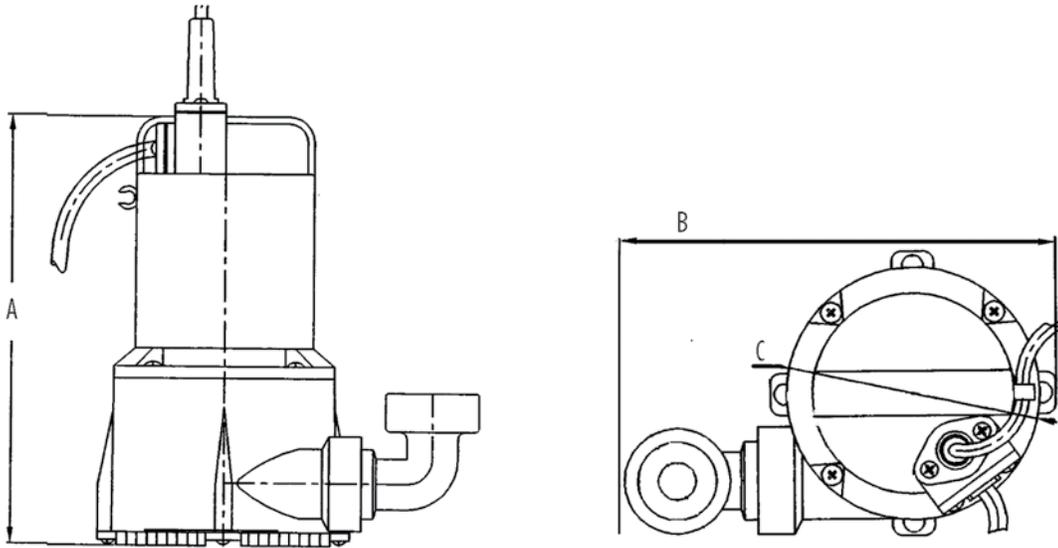

A	B	C
10"	11.8"	5.87"
25.4 cm	29.97 cm	14.09 cm

PERFORMANCE DATA

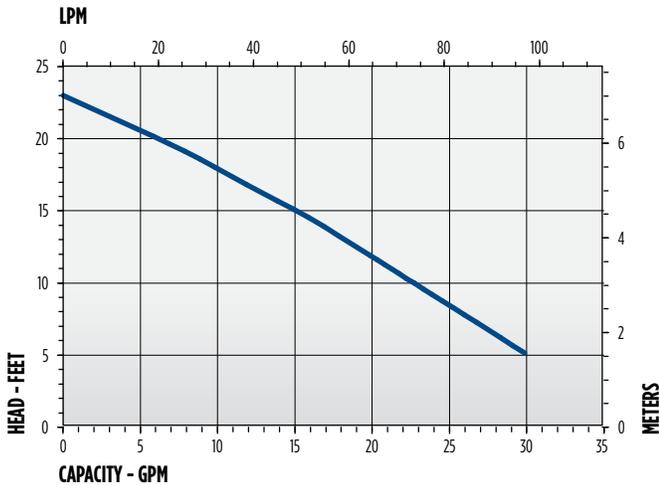

CONSTRUCTION

Motor Housing	Thermoplastic
Impeller Material	Thermoplastic
Impeller Type	Semi-open
Volute	Thermoplastic
Motor Shaft	Stainless steel
Shaft Seal	Lip
Fasteners	Stainless steel
Bearings	Upper and lower ball bearings
Power Cord	SJTW